




CONT. RUBBER INSERT
0.060 ALUM. CENTER PLATE, CLEAR ANODIZED FINISH

FASTENERS @ 20" O.C. MAX, BY INSTALLER
CONT. ALUM. BASE MEMBER, MILL FINISH
CLIPS (FIELD INSTALLED)
CONT. ALUM. EXPOSED EXTRUSION
CLEAR ANODIZED FINISH

SCALE: 6"=1'-0"

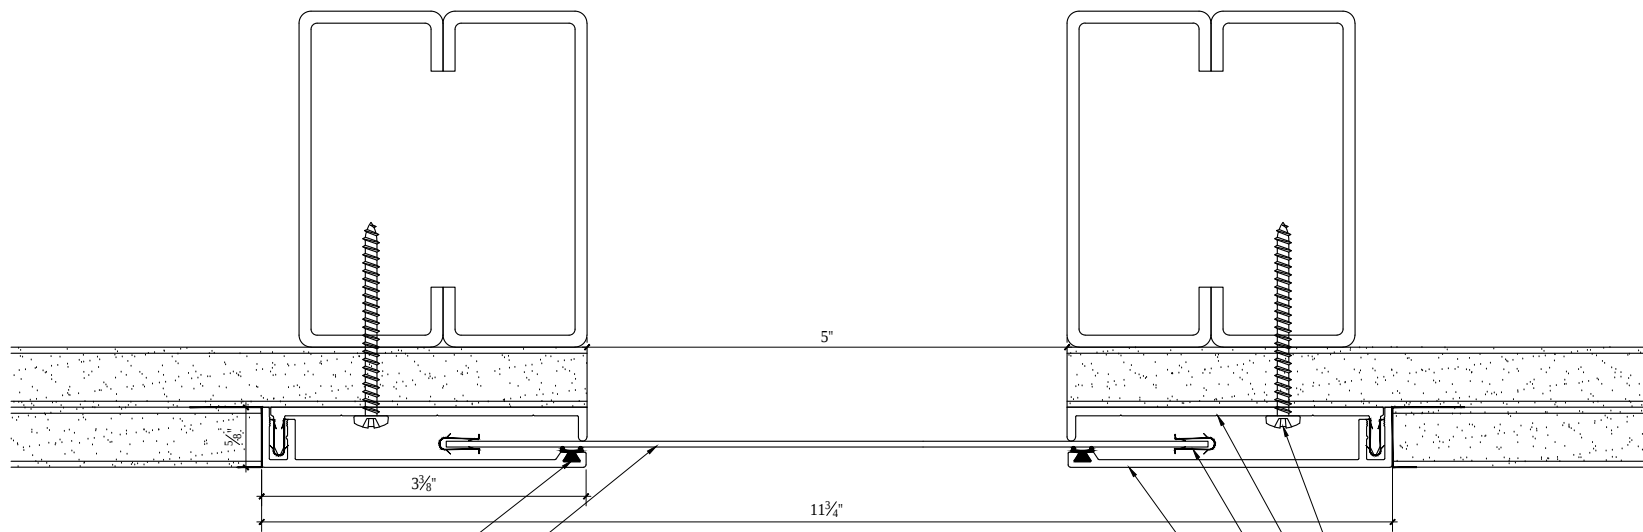

M.H. POWELL & CO., INC.
ARCHITECTURAL SEISMIC EXPANSION JOINT SYSTEMS

2313 YATES AVENUE | PHONE : (323) 887-0037
COMMERCE, CA 90040 | FAX : (323) 887-0877
WEB : www.mhpowell.net

MODEL
KH-5-3

INTERIOR WALLS / CEILINGS
Flush Mount

PROJECT : _____ PROJECT # : _____
LOCATION : _____ DATE : _____
ARCHITECT : _____
CUSTOMER : _____

PAGE #